


Produktblad

Kronfilter REV 942 22/02

10 par tele med ÖSP-skydd

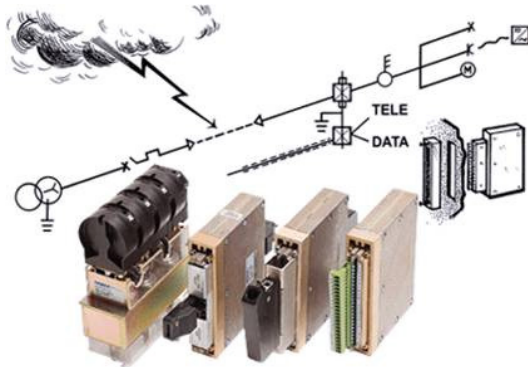

Teknisk data

Artikelnummer: **650031**

Capacity	10 line pairs
Max DC current	Max 150 mA
Max DC voltage	Max 60 V
Max AC voltage	Max 250 V RMS
Max AC continuous voltage (600Ω)	Max 100 V
Max ring signal voltage	Max 110 V RMS
Max power	Max 15 W
Nett loss attenuation 0,1 - 30 MHz	> 50 - 70 dB
Nett loss attenuation 30 - 300 MHz	> 70 dB
Nett loss attenuation 300 - 1000 MHz	> 70 - 50 dB
Connections protected side	22-pole terminal block
Connections unprotected side	22-pole terminal block
Connection kit	NGP 00/04
Operation temperature	-10 to +40°C
Residue voltage LEMP at test current 10kA 10/100 μs	< 200 V
Residue voltage NEMP at test current 1kA 5/1000 ns	< 40 V

Förbindelseschema					
Line	P1	P2	Line	P1	P2
Jord		-	6a	11 - 11	
1a	1	- 1	b	12 - 12	
b	2	- 2	7a	13 - 13	
2a	3	- 3	b	14 - 14	
b	4	- 4	8a	15 - 15	
3a	5	- 5	b	16 - 16	
b	6	- 6	9a	17 - 17	
4a	7	- 7	b	18 - 18	
b	8	- 8	10a	19 - 19	
5a	9	- 9	b	20 - 20	
b	10	- 10	Jord		-

